BESTON GROUP CO., LTD
9 FLOOR, 6 BUILDING, E-COMMERCIAL PORT OF CENTER,
ZHENGZHOU CITY, CHINA
TEL: 0086-371-55181866 WEB: www.bestongroup.com

日期Date: 2026.06.05

样品资料/Sample information:

样品名称 Name	青稞	送样重量 Weight	——
样品状态 Sample status		取样重量 Sampling weight	100g
实验用时 Time	3H00min	实验温度 Temperature	138℃
实验过程Experimental process:		Carbonization	

序号 No.	时间段 Time	可燃气温度 Syngas temperature	物料温度 material temperature	备注 Remark
1	14:31	26℃	30℃	Start heat
2	14:50	92℃	323℃	Small syngas
3	14:50	92℃	333℃	Start generate oil
4	14:55	92℃	440℃	Fastly generate oil
5	15:05	98℃	520℃	
6	15:10	106℃	510℃	Slowly generate oil
7	16:01	134℃	508℃	Stop generate oil
8	16:09	138℃	509℃	
9	17:31	130℃	493℃	Stop heat
10				
11				
12				

实验结果/Result:

项目 Item	组成 Composition	单位/g Unit/g	占比量/% Ratio/%
	Wood vinegar and tar	33g	33.00%
	Biochar	41g	41.00%
	Syngas	26g	26.00%
实验总结 Test summary			

备注: 以上数据仅供参考 Noted: The above data is for reference only	签章/signature: Mr. Li

BESTON GROUP CO., LTD
9 FLOOR, 6 BUILDING, E-COMMERCIAL PORT OF CENTER,
ZHENGZHOU CITY, CHINA
TEL: 0086-371-55181866 WEB: www.bestongroup.com

Raw materials pictures



Wood vinegar and tar pictures

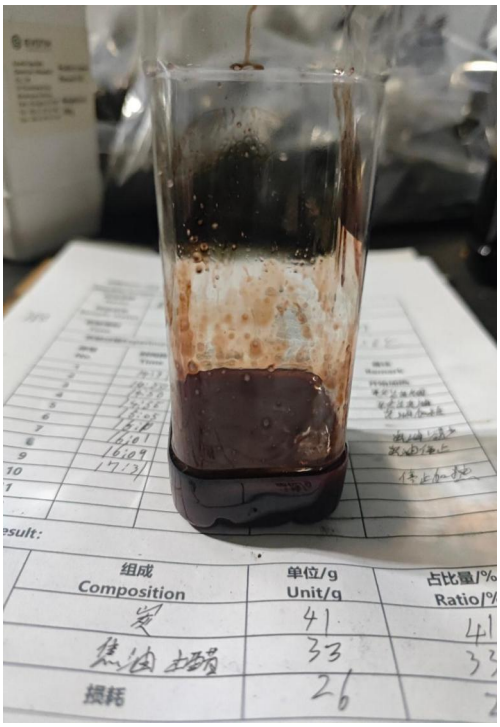

Biochar picturees

