BESTON GROUP CO., LTD
9 FLOOR, 6 BUILDING, E-COMMERCIAL PORT OF CENTER,
ZHENGZHOU CITY, CHINA
TEL: 0086-371-55181866 WEB: www.bestongroup.com

日期Date:	2025/10/15	送样人Sender:	夏紫薇

样品资料/Sample information:

样品名称 Name	Oil sludge	送样重量 Weight	——
样品状态 Sample status		取样重量 Sampling weight	450g
实验用时 Time	2H17min	实验温度 Temperature	334℃
实验过程Experimental process:		普通裂解	

序号 No.	时间段 Time	烟气温度 Flue gas	备注 Remark
1	12:14	24℃	Start Heating
2	12:28	96℃	Oil starts to come out
3	12:30	100℃	Accelerate oil output
4	12:52	98℃	Smoke
5	12:58	208℃	Switch beakers
6	13:36	312℃	Heavy smoke
7	13:54	334℃	\
8	14:17	301℃	Reduced oil output
9	14:31	180℃	Oil output stopped


实验结果/Result:

项目 Item	组成 Composition	单位/g Unit/g	占比量/% Ratio/%
	Water	48g	10.67%
	pyrolysis oil (< 200°C)	28g	6.22%
	pyrolysis oil (> 200°C)	289g	64.22%
	Slag	27g	6.00%
	Combustible gas	58g	12.89%
实验总结 Test summary			

备注: 以上数据仅供参考 Noted: The above data is for reference only	


BESTON GROUP CO., LTD
9 FLOOR, 6 BUILDING, E-COMMERCIAL PORT OF CENTER,
ZHENGZHOU CITY, CHINA
TEL: 0086-371-55181866 WEB: www.bestongroup.com

Raw material pictures

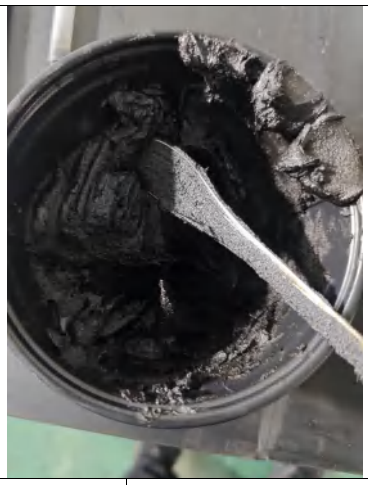

Pyrolysis oil pictures



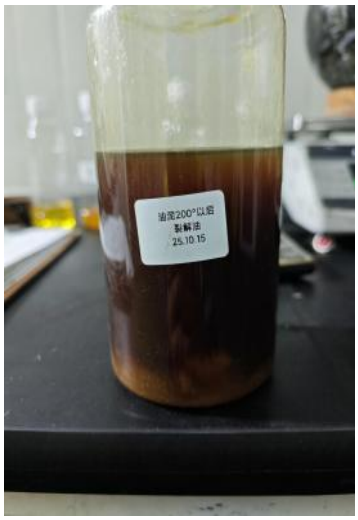

Slag

