



BESTON GROUP CO., LTD
9 FLOOR, 6 BUILDING, E-COMMERCIAL PORT OF CENTER,
ZHENGZHOU CITY, CHINA
TEL: 0086-371-55181866 WEB: www.bestongroup.com

日期Date: 2026/3/22 送样人Sender: 冯超辉

样品资料/Sample information:

样品名称 Name	Tire strip	送样重量 Weight	—
样品状态 Sample status		取样重量 Sampling weight	300g
实验用时 Time	3H39min	实验温度 Temperature	297℃

实验过程Experimental process:

普通裂解

序号 No.	时间段 Time	烟气温度 Flue gas	备注 Remark
1	14:22	18℃	Start heating
2	14:57	93℃	Oil starts to comeout
3	15:03	118℃	Accelerate oil output
4	15:05	146℃	Smoke production starts
5	15:12	216℃	Large amounts of smoke
6	15:38	297℃	/
7	15:45	297℃	Oil output slows down
8	16:29	269℃	Stop oil discharge
9	18:01	213℃	Stop heating
10			
11			
12			

实验结果/Result:

项目 Item	组成 Composition	单位/g Unit/g	占比量/% Ratio/%
	Pyrolysis oil	113g	37.67%
	Carbon black	154g	51.33%
	Combustible gas	33g	11.00%

实验总结
Test summary

备注:
以上数据仅供参考
Noted:
The above data is for reference only

签章/signature:




BESTON GROUP CO., LTD
9 FLOOR, 6 BUILDING, E-COMMERCIAL PORT OF CENTER,
ZHENGZHOU CITY, CHINA
TEL: 0086-371-55181866 WEB: www.bestongroup.com

Raw material pictures



Oil sample pictures

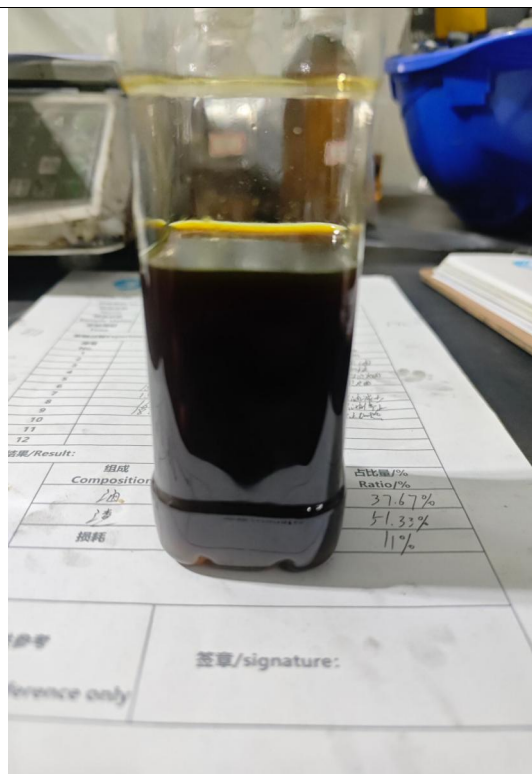

Carbon black pictures

