



BESTON GROUP CO., LTD
9 FLOOR, 6 BUILDING, E-COMMERCIAL PORT OF CENTER,
ZHENGZHOU CITY, CHINA
TEL: 0086-371-55181866 WEB: www.bestongroup.com

日期Date: 2026.05.06

送样人Sender: 王梦雅

样品资料/Sample information:				
样品名称 Name	木片		送样重量 Weight	—
样品状态 Sample status			取样重量 Sampling weight	150g
实验用时 Time	3H49min		实验温度 Temperature	244℃
实验过程Experimental process:			Carbonization	
序号 No.	时间段 Time	可燃气温度 Syngas temperature	物料温度 material temperature	备注 Remark
1	14:23	22℃	25℃	Start heat
2	14:36	78℃	127℃	Small syngas
3	14:38	96℃	178℃	Start generate oil
4	14:39	101℃	220℃	Fastly generate oil
5	14:40	104℃	243℃	More syngas
6	14:56	232℃	551℃	Slowly generate oil
7	15:51	244℃	631℃	
8	15:52	244℃	631℃	Stop generate oil
9	18:12	184℃	460℃	Stop heat
10				
11				
12				
实验结果/Result:				
项目 Item	组成 Composition	单位/g Unit/g	占比量/% Ratio/%	
	Wood vinegar and tar	65g	43.33%	
	Biochar	46g	30.67%	
	Syngas	39g	26.00%	
实验总结 Test summary				
备注: 以上数据仅供参考 Noted: The above data is for reference only			签章/signature: Mr. Li	




BESTON GROUP CO., LTD
9 FLOOR, 6 BUILDING, E-COMMERCIAL PORT OF CENTER,
ZHENGZHOU CITY, CHINA
TEL: 0086-371-55181866 WEB: www.bestongroup.com

Raw materials pictures



Wood vinegar and tar pictures

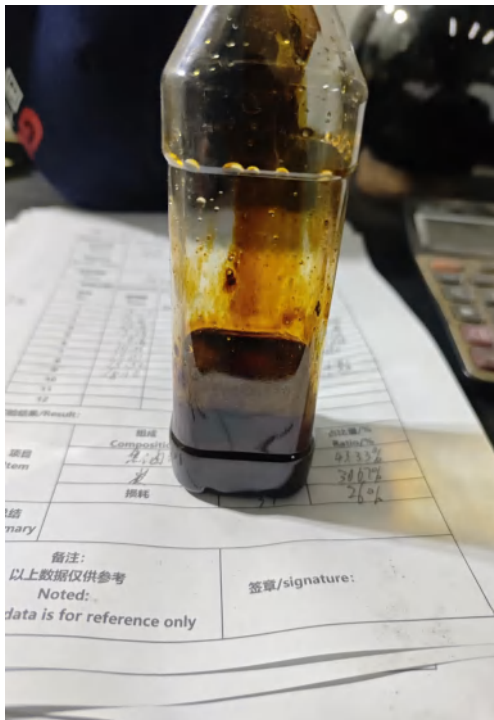

Biochar pictures

